

Active Sensors

CERAVAC Transmitters CTR 100 N and CTR 101 N



CERAVAC Transmitter CTR 100 N (left) und CERAVAC Transmitter CTR 101 N (right)

Advantages to the User


- Excellent accuracy and long-term stability
- Very good temperature compensation regardless of ambient conditions
- Highly resistant against corrosion and aggressive gases
- Fast and accurate response to pressure changes
- Improved reliability by high overpressure rating
- Serial Interface (RS 232 protocol)
- Zero adjust push button
- Optional heated (45 °C) version offers 2x better accuracy

Typical Applications


- General vacuum measurement and control with very low measurement uncertainty
- Fore and medium vacuum pressure measurement
- Research & Development
- System process control
- Chemical and Semiconductor processes
- LED and solar cell manufacturing
- Physical Vapor Deposition (PVD)
- Reference sensor for calibration systems

The CERAVAC transmitters with an advanced all-welded INCONEL® and stainless steel sensor and microprocessor-based electronics offer excellent accuracy and reproducibility. The CTR 100 N and CTR 101 N allow gas type independent pressure measurements and are able to tolerate bursts of pressure without suffering physical damage or calibration shifts. The robust sensor is suited for the most corrosive processes as the sensor is highly resistant to corrosion from common process chemicals. The sensor of the CTR 101 N is internally heated and regulated to 45 °C to offer full-scale pressure ranges from 1000 to 0.1 Torr.


INCONEL® is a registered trademark of Inco Alloys International, Inc.

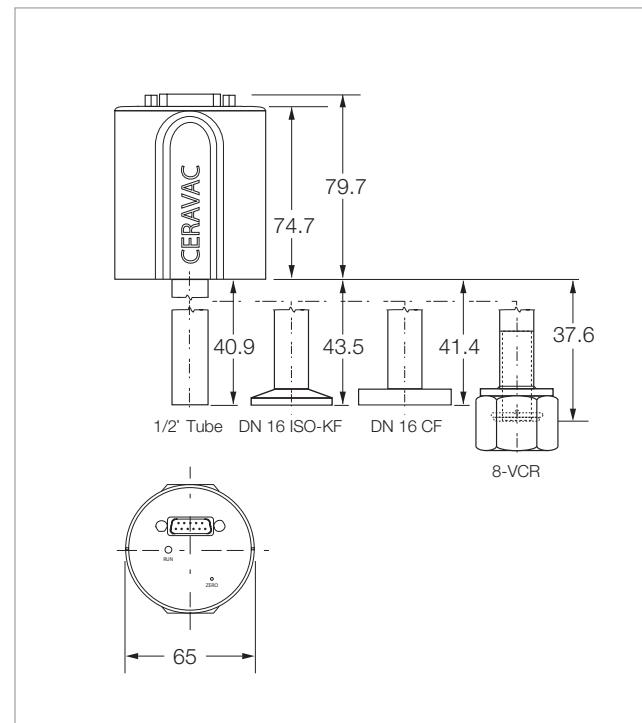

Dimensional drawing for the CERAVAC Transmitter CTR 100 N (mm)

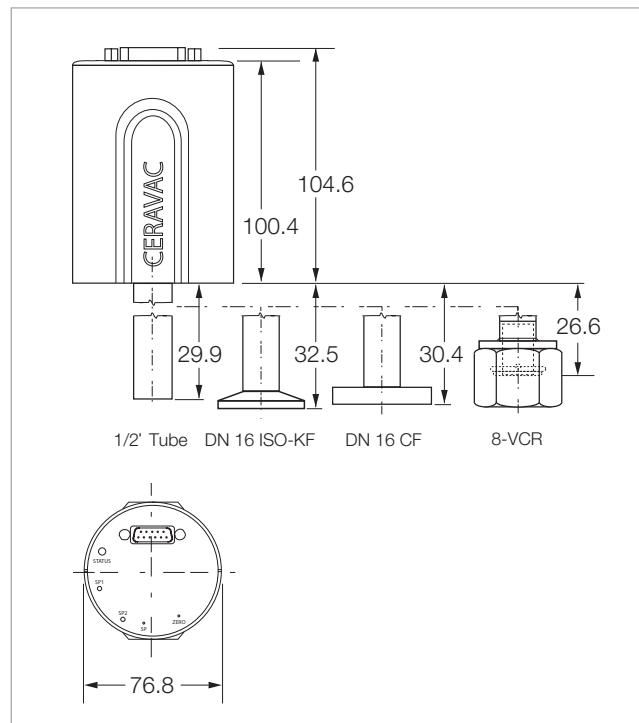

Dimensional drawing for the CERAVAC Transmitter CTR 101 N (mm)

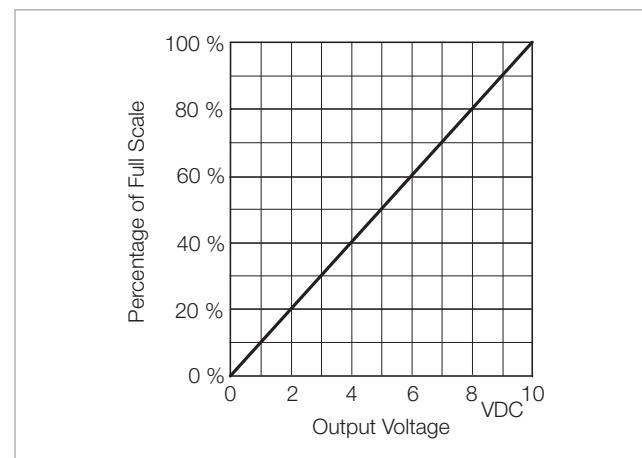

Characteristic of the CERAVAC Transmitter CTR 100 N and CTR 101 N

Technical Data

CERAVAC Transmitter

		CTR 100 N (Temperature Compensated)	CTR 101 N (45 °C heated)
Full scale (FS) / Measurement range		0,1 Torr / 1×10^{-5} – 0,1 Torr 1 Torr / 1×10^{-4} – 1 Torr 10 Torr / 1×10^{-3} – 10 Torr 20 Torr / 2×10^{-3} – 20 Torr 100 Torr / 0,01 – 100 Torr 1000 Torr / 0,1 – 1000 Torr	0,1 Torr / 1×10^{-5} – 0,1 Torr 1 Torr / 1×10^{-4} – 1 Torr 10 Torr / 1×10^{-3} – 10 Torr – 100 Torr / 0,01 – 100 Torr 1000 Torr / 0,1 – 1000 Torr
Measurement uncertainty		0.2% ± temperature effect 0.5% ± temperature effect (0.1 Torr)	0.12% ± temperature effect 0.15% ± temperature effect (0.1 Torr)
Sensor		INCONEL® membrane	
Measurement principle		Capacitance diaphragm gauge	
Supply voltage	V DC		+14 to +30
Power consumption	W	≤ 1	≤ 11 (at operating temperature ≤ 8)
Electrical connection			15-pol. Sub-D
Analog output Measurement range	V		0 to 10
Interface			RS 232
Setpoints		0	2
Status indicators			LED
Max. cable lenght	m		30
Max. overrange pressure	bar (hPa)		3.1 (3100)
Operating temperature range	°C (°F)	+15 to +50	+15 to +40
Storage temperature range	°C (°F)		-20 to +80
Max. bakeout temperature	°C (°F)		Not bakeable
Max. rel. humidity	% n.c.		25 to 95
Installation orientation			Any
Wetted part material			INCONEL®, Stainless steel 316
Dead volume, approx.	cm³		6.29
Gewicht	g (lbs)	513 (0.11)	669 (0.15)
Protection class	IP		40
CE certification			EMC Directive 2014/30/EEC
Controller type			GRAPHIX ONE / TWO / THREE
Temperature effects			
Zero of FS	%/°C	0,005 (1000/100/20/10 Torr) 0,015 (1 Torr) 0,02 (0,1 Torr)	0,0025 (1000/100/10/1 Torr) 0,005 (0,1 Torr)
Span of reading	%/°C	0,01 (1000/100/20/10/1 Torr) 0,03 (0,1 Torr)	0,01 (1000/100/10/1 Torr) 0,03 (0,1 Torr)
Response time (10% to 90% FS)	ms		40 / 80 (1 Torr) / 120 (0,1 Torr)

Ordering Information

CERAVAC Transmitter

CTR 100 N

CTR 101 N

	Part No.	Part No.
DN 16 ISO-KF 1000 Torr 100 Torr 20 Torr 10 Torr 1 Torr 0.1 Torr	230300V02 230301V02 230340V02 230302V02 230303V02 230304V02	230320V02 230321V02 - 230322V02 230323V02 230324V02
DN 16 CF-R 1000 Torr 100 Torr 10 Torr 1 Torr 0.1 Torr	230305V02 230306V02 230307V02 230308V02 230309V02	230325V02 230326V02 230327V02 230328V02 230329V02
Cajon 8-VCR 1000 Torr 100 Torr 10 Torr 1 Torr 0.1 Torr	230310V02 230311V02 230312V02 230313V02 230314V02	230330V02 230331V02 230332V02 230333V02 230334V02
1/2" Tube 1000 Torr 100 Torr 10 Torr 1 Torr 0.1 Torr	230315V02 230316V02 230317V02 230318V02 230319V02	230335V02 230336V02 230337V02 230338V02 230339V02
Calibration	See Section "Miscellaneous", paragraph "Leybold calibration service"	
Operating Units GRAPHIX ONE GRAPHIX TWO GRAPHIX THREE	230680V01 230681V01 230682V01	
Connection cable, Sub-D 15-way female to Sub-D 15-way male, shielded 5 m 10 m 15 m 20 m 30 m	Type C 124 55 230 022 124 56 124 57 124 58	